

Econoled Waterproof

Waterproof 2xT8



This luminaire is an efficient and non-expensive solution for traditional fluorescent. Allow to install 2 LED tubes up to 20W each. Is offered in IP65 degree ingress protección and it suitable for multiple lighting applications.

Applications


- Parking lots
- Corridors
- General Transit indoor areas

Specification

- IP degree : IP65
- IK rating: IK06
- Suitable for ceiling mount or suspend.
- Wattage : Up to 2x20W LED Tubes one ended installation
- Operating voltage : AC100 – 277V 50/60Hz.
- Lamp type : LED T8
- Luminaire Class : Class I luminaire

SKU	Descripción	Flujo Luminoso	Eficacia	Disponibilidad*
93141378	LED WTRPRF 402T84F001	No aplica	No aplica	Inmediata

Dimensions

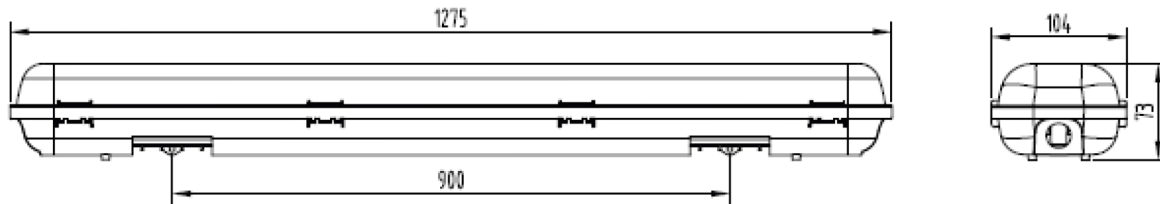

Ordering Logic

EJ: LED WTRPRF 402T84F

Model	Wattage	Tube Type	Base	Size
LED WTRPRF	40= for 2x20W (max power)	2T	T8	4F

LED WTRPRF = ECONOLED WATERPROOF
 40 = for maximum 2x20W Led tubes
 2T = Suitable for 2 Led tubes
 T8 = Works for T8 LED tubes
 4F = 4 feet